

Essential Commercial TV with Multiple Use

LG Commercial Lite TVs are designed specifically for hospitality and business environments. With the use of simple user-friendly interfaces and superb images and video, the LX330C/LX341C series create a more hospitable welcome for guests and customers.



LX341C : 49" 55" 60" 65"

LX330C : 32H" 42"
LX300C : 32"

LX341C
/ LX330C
/ LX300C

- Welcome Video / Screen
- Remote Jack Pack
- Hotel Mode
- USB Cloning
- Self Diagnostics
- USB Auto Playback

Hospitality Solutions



Welcome Video/Screen

With the capability to display various video formats* as well as images, Commercial Lite TVs allow for a greater variation of greeting messages in hotel rooms which make customers feel more welcome and cared for.

* mp4, avi, mov, tp, wma, ts etc.



One Channel Map

One Channel Map feature allows users to edit and list the channels of their choice from any of the multiple broadcasting signals.



External Speaker Out

The external speaker out function lets users enjoy the external speaker in a separate place such as the bathroom.



Remote Jack Pack

The plug and play function of the Remote Jack Pack enables users to seamlessly view their media on the hospitality TV in the hotel room.

Simple & Effective Maintenance



Hotel Mode

From channel selection to volume setting, you can control the TV settings in all the rooms with Hotel Mode. Prevent misuse by customers, set volume limits, or reset settings to default for any TV. You are in control of it all.



USB Cloning

Clone all hotel TVs with astonishing speed and ease. The USB Cloning feature allows you to simply copy the TV settings to all TVs using a USB stick, a process that is fully automated to save time without having to set each TV individually.



Lock Mode

The Lock Mode blocks external input signals with non-compliant content. A useful feature for preventing misuse of TVs in various facilities or public spaces.



Self Diagnostics

Enables service engineers to recognize technical issues in a TV quickly and easily through a USB. The TV stores any technical issues encountered and can output them to a USB device. Service engineers use this information to analyze technical issues without the actual TV.

Basic Signage Features



USB Auto Playback

LG Commercial TVs recognize playable contents in external storages and play them automatically and repeatedly. This feature is available whether the TV is located in a lobby, restaurant or some other commercial facility.



Interactivity Ready

Allows you to connect interactive set top boxes or media players enabling you to control and manage your TV via RS232C cable.


Commercial Lite

Specifications


		LX 341C	LX 330C / LX 300C	
Model Information	Category	Commercial Lite	Commercial Lite	
	Region	ASIA	ASIA	
	ATS	3/4W	3/4W	
	Size	49 / 55 / 60 / 65	32H / 42	
	Chassis Platform	L15 (Commercial)	L15 (Commercial)	
Broadcasting System	Analog	• (PAL/NTSC-M)	• (PAL/NTSC-M)	
	Digital	• DVB-T2/T(varied by region)	• DVB-T2/T(varied by region)	
	Cable	• DVB-C	• DVB-C	
Video	Resolution	1920 x 1080 (FHD)	32H": 1366 x 768 (HD) 42": 1920 x 1080 (FHD)	
	Triple XD Engine	•	•	
	Aspect Ratio	• 8 modes (16:9, Just Scan, Original, Full wide, 4:3, 14:9, Zoom, Cinema Zoom 1)	• 8 modes (16:9, Just Scan, Original, Full wide, 4:3, 14:9, Zoom, Cinema Zoom 1)	
Audio	Audio Output	10W + 10W	10W + 10W	
	Sound System	2.0 ch	2.0 ch	
	Sound Mode	• 6 modes (Standard, News, Music, Cinema, Sport, Game) • 6 modes(India only) (Standard, News, Bollywood, Cinema, Cricket, Game)	• 6 modes (Standard, News, Music, Cinema, Sport, Game) • 6 modes(India only) (Standard, News, Bollywood, Cinema, Cricket, Game)	
Feature	Clear Voice II	•	•	
	Connectivity	MHL	•	
	Interactivity	HDMI-CEC	•	•
		HTNG-CEC	•	•
	Welcome Video/Screen	•	•	
	Lock Mode	•	•	
	One Channel Map	•	•	
	Multi IR Code	•	•	
	Hotel Mode	•	•	
	USB Cloning	•	•	
	IR Out	• (RS-232C)	• (RS-232C)	
	USB	USB Auto Play Back	•	•
		Moving Picture Playback (SD/HD/Plus HD)	Divx HD	Divx HD
		Picture	JPEG	JPEG
		Audio Codec	MP3, AC3, MPEG, AAC, HEAAC, CDDA, LPCM	MP3, AC3, MPEG, AAC, HEAAC, CDDA, LPCM
	External Speaker Out	• (Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	LX330C only • (Int/Fixed, 3.5mm, Stereo, Single ended Type(GND,L/R), 1W with 8Ω)	
	RJP Compatibility	• Teleadapt (RS232C), Teleadapt/Guestlink (HDMI CEC)	• Teleadapt (RS232C), Teleadapt/Guestlink (HDMI CEC)	
	RJP Interface	• (RS232C, HDMI CEC)	• (RS232C, HDMI CEC)	
	Auto Off/ Auto Sleep	•	•	
	Smart Energy Saving	•	•	
Anti-theft System	Kensington Lock	•		
Accessory	Remote type	L-CON	L-CON	
	Cable	Power cord	Power cord	
	Manual / ESG	CD title (Simple manual)	CD title (Simple manual)	
Power	Voltage, Hz	100 ~ 240V, 50/60Hz	100 ~ 240V, 50/60Hz	
	Max (Watts)	49": 107.7W , 55": 106.6W 60": 157.1W , 65": 149.4W	32H": 84.3W 42": 109.5W	
	Typical(Watts)	49": 83.5W , 55": 84.0W 60": 131.2W , 65": 122.9W	32H": 59W 42": 83.7W	
	Energy saving (Min)	49": 72W , 55": 74W 60": 92W , 65": 87W	32H": 48W 42": 71W	
	Energy saving (Med)	49": 60W , 55": 63W 60": 72W , 65": 70W	32H": 40W 42": 59W	
	Energy saving (Max)	49": 49W , 55": 49W 60": 52W , 65": 51W	32H": 33W 42": 48W	
	Stand-by	49": 0.22W , 55": 0.20W 60": 0.22W , 65": 0.23W	32H": 0.25W 42": 0.26W	
Tool Description	VESA Compatibility	49": 300 x 300 , 55": 300 x 300 60": 300 x 300 , 65": 300 x 300	32H": 200 x 200 42": 400 x 400	
	Safety	CB, BIS, SIRIM, TISI, BPS, PSB, SNI	CB, BIS, SIRIM, TISI, BPS, PSB, SNI	
Required Listing (Certification)	Environment	CISPR	CISPR	
	Etc.	MEPS, Tick, EE, CIF, BEE, Freeview	MEPS, Tick, EE, CIF, BEE, Freeview	

Dimension

LX341C : 49" / 55" / 60" / 65"

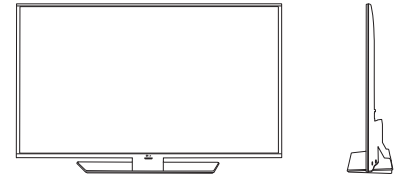

LX330C : 32H" / 42" LX300C : 32"

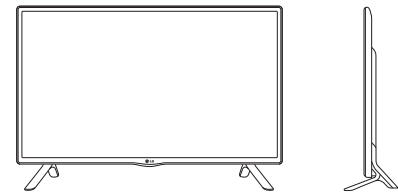

		LX341C	LX330C / LX300C
Set Size (W/O Stand, WxHxD, mm)	49"	1106 x 647 x 37(SPK 55.1)	32H" 732 x 431 x 55.5
	55"	1242 x 724 x 37(SPK 55.1)	42" 961 x 567 x 55.5
	60"	1363 x 792 x 39(SPK 57.1)	
	65"	1461 x 848 x 39(SPK 57.3)	
Set Size (With Stand, WxHxD, mm) / Set Weight (With Stand, kg)	49"	1106 x 701 x 325 / 17.8	32H" 732 x 481 x 207 / 6.2
	55"	1242 x 780 x 325 / 21.1	42" 961 x 610 x 218 / 9.5
	60"	1363 x 844 x 294 / 29.3	
	65"	1461 x 899 x 294 / 34.0	
Packing Size (With Stand, WxHxD, mm) / Packing Weight (With Stand, kg)	49"	1197 x 760 x 162 / 21.0	32H" 810 x 495 x 146 / 7.4
	55"	1330 x 813 x 152 / 25.1	42" 1060 x 660 x 152 / 11.6
	60"	1484 x 906 x 159 / 34.9	
	65"	1548 x 970 x 159 / 41.0	

Connectivity

LX341C / LX330C / LX300C

- ① OPTICAL DIGITAL AUDIO OUT
- ② HDMI
- ③ RGB IN(PC)
- ④ RS 232C (CONTROL & SERVICE)
- ⑤ EXTERNAL SPEAKER OUT
- ⑥ ANTENNA/CABLE IN
- ⑦ COMPONENT IN(AV IN)
- ⑧ HDMI IN 2 (MHL)
- ⑨ USB IN 1
- ⑩ USB IN 2
- ⑪ H/P OUT

